

# ROAD

over Millrace at

## Bill of Timber

### For Foundation

14 Sticks 10 by 12 in each 21 Ft long  
 32 D<sup>o</sup> 10 by 12 in do 5 d<sup>o</sup> d<sup>o</sup>

450 Ft P.M. 3 in Plank

### For Superstructure

2 Sticks 8 by 12 each 16 Ft 8 in long  
 4 String pieces 8 by 12 at the ends and 8 by 18 for 14 Ft  
 in the middle each 44 Ft long

3 D<sup>o</sup> 10 by 12 at ends and 10 by 18 for 14 Ft  
 in the middle each 44 Ft long

12 Studs 6 by 6 d<sup>o</sup> 4 Ft 3 in d<sup>o</sup>

2 Rails 6 by 6 d<sup>o</sup> 44 Ft d<sup>o</sup>

755 Ft P.M. 3 in Plank 14 Ft 6 in in length

### Iron


8 Key bolts 1 in square each 20 in long  
 exclusive of head and key - 50 lbs

Masonry 156 Perches

Excavation 190 Cubic yards

mostly under water.

The timbers will be all white pine

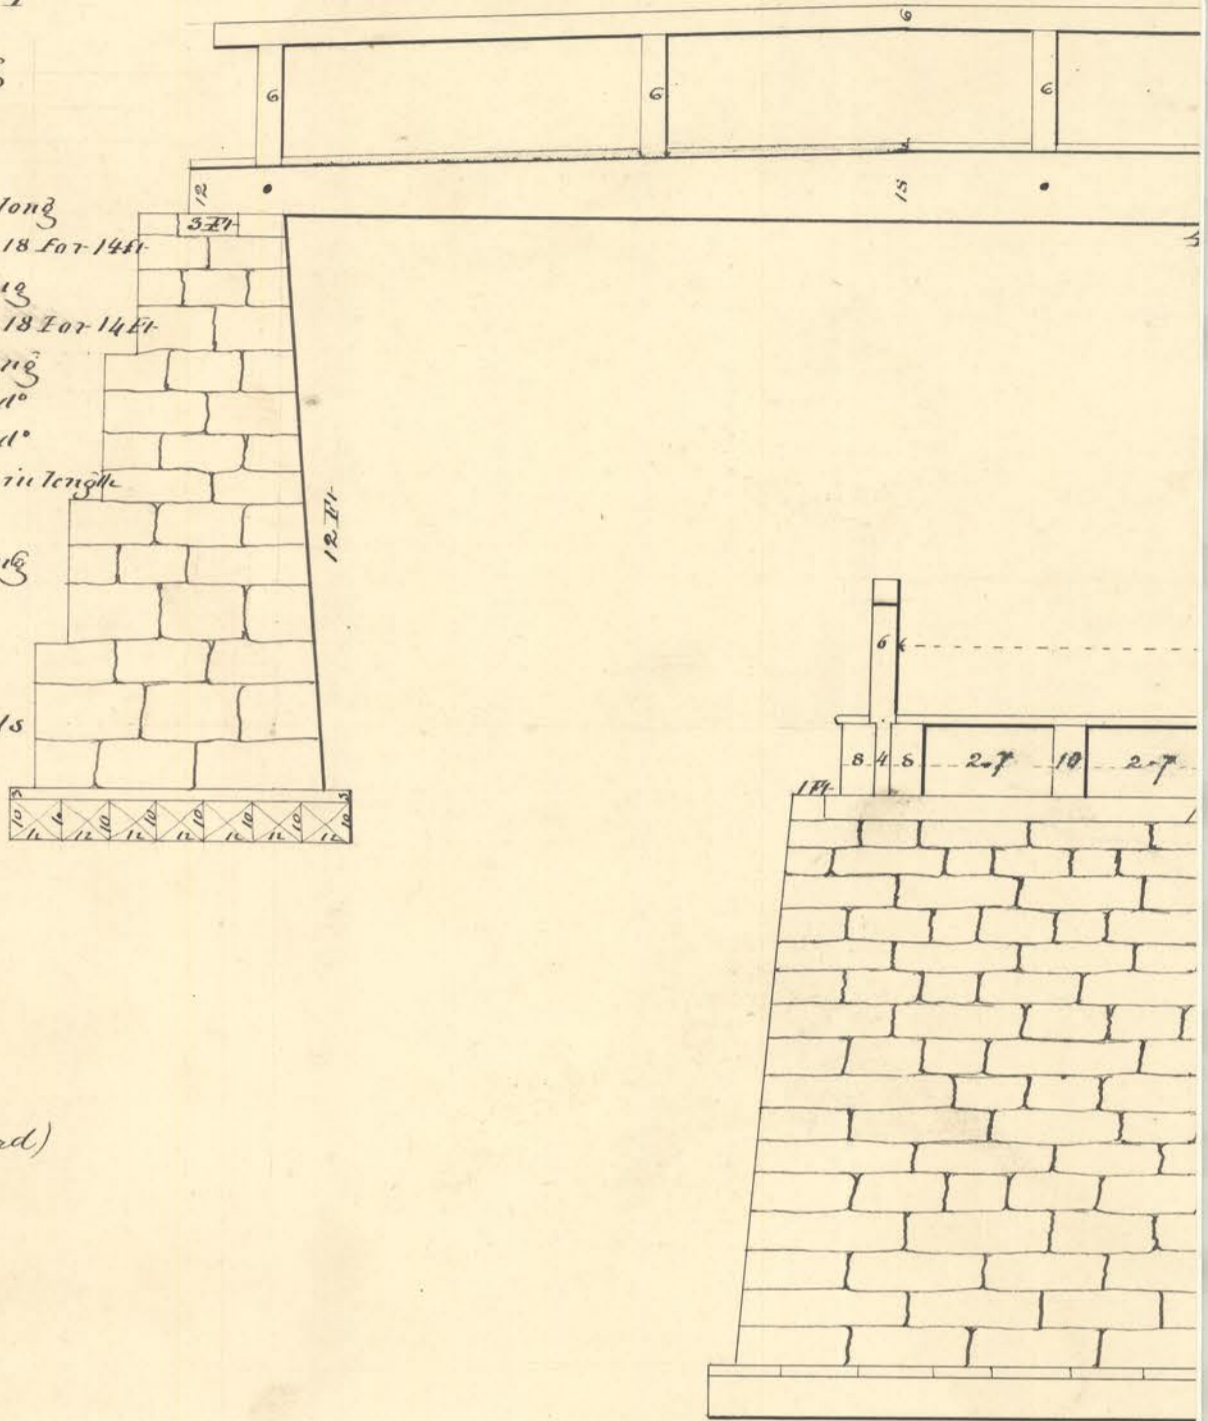

## Road.

Excavation 1,200 Cubic yards (hard)

Embankment 3,400 " "

