



Bill of Lumber for Dry Dock

- 98 Mud sills 33 feet long 12 inches thick
- 9000 feet of 2 inch plank for bottom
- 5700 " " " " " Sheet piling - 7 ft long
- 300 " (Special) Timber for top of sheet piling - 8x10

For Drop Gate

- 1 Piece 18 ft long 9x13 oak
- 1 " 18 " " 10x13 "

250 ft 2 inch pine Plank

- 2 Pieces 5 ft long 10x13 oak

For Waste Gate

- 2 Mud sills 22 ft long 8x10

- 2 oak Posts 7 " " 10x12

- 4 Pine " 6 " " 7x8

- 1 Cap 6 " " 8x12

- 2 " 6 " " 8x8

- 4 Braces 7 " " 5x7



250 feet Pine plank 2 inches thick

- 1 Piece 12 ft long 4x10

- 2 " 4 " " 4x13

Banks

The Banks to be made the same width and have the same slope as the Bern bank of the Canal unless the builder should prefer facing with a stone wall in such case the wall to be battered 3 inches to the foot inside and 6 inches to the foot out side of the embankment. The embankment to be at least eight feet wide on top

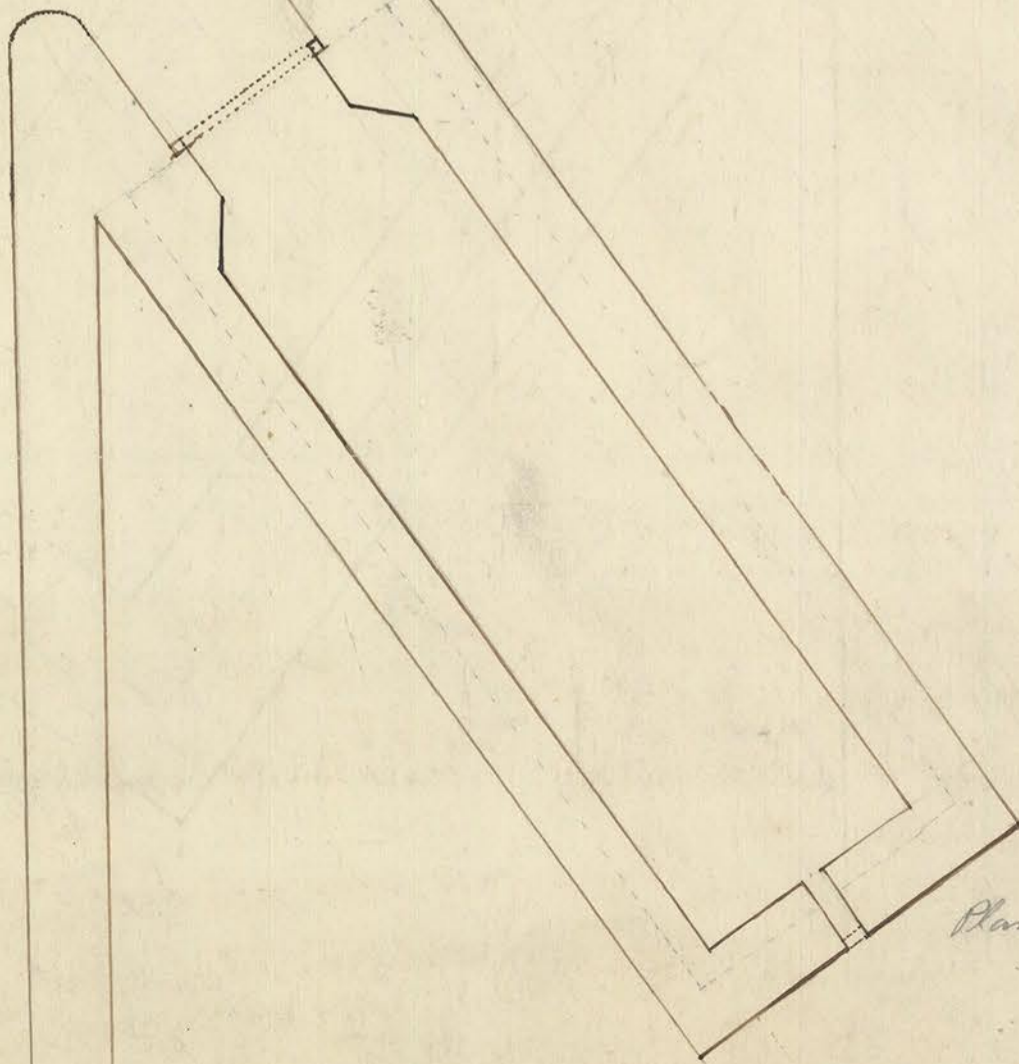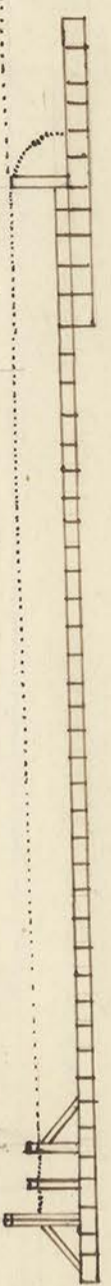

Plan of work on the Eastern Dock
Foster Supervisor